


# FLO-GritWash

FGW

Classifying and Washing System

## Specifications

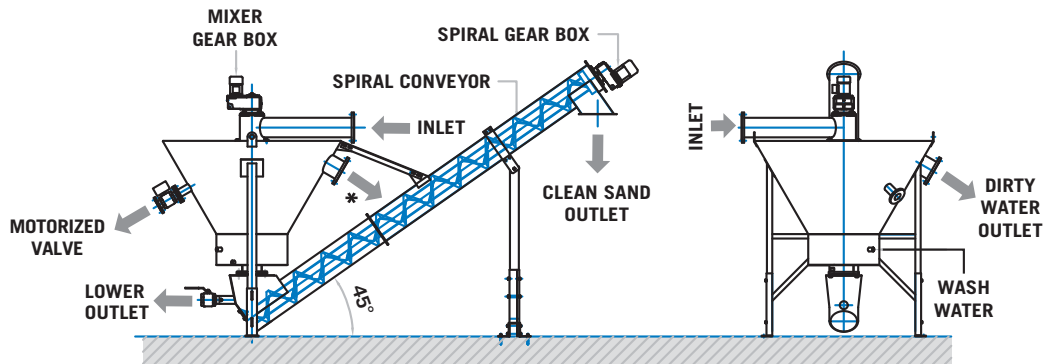

### Specifications

		FGW-10	FGW-20	FGW-30
<b>Capacity</b>	l/sec	10	20	30
	gpm	159	317	476
<b>Separation rate</b>	Kg/h	180 - 300	400 - 600	800 - 1000
<b>Water Consumption</b>	gpm at 2 bar	7	11	11
<b>Particle separation &gt;0.2 mm</b>	%		95	
<b>Organic content at discharge</b>	%		<3	
<b>Controls</b>		304 SS NEMA 4X		
<b>Drive motor-mixer</b>	HP		0.5	
<b>Drive motor-spiral</b>	HP		1.5	

### Materials of Construction

<b>Tank</b>	AISI 304 SS (316 Optional)
<b>Transport tube</b>	AISI 304 SS (316 Optional)
<b>Shafted spiral</b>	High Strength Alloy Steel (304/316 SS Optional)

Technical information subject to change without notice.

Enviro-Care is the exclusive licensee for SAVI S.R.L. technologies in North America.