


FLO-RotoDrum

FRI

Internally-fed Rotating Drum Screen

Specifications

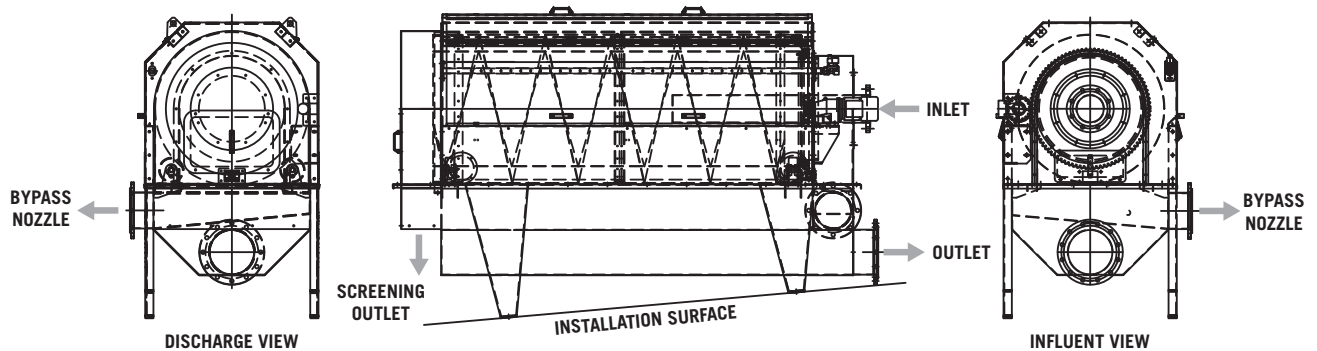

Specifications

Perforated media openings	mm	1 - 6
Openings for MBR (standard)	mm	1 and 2
Flow rates to	mgd	8
Wash water pressure	bar	5 - 8
Nozzle openings (std)	mm	250
Power	kW	0.37
Electric motor		3P 460V 60Hz IP55

Materials of Construction

Frame	AISI 304 SST (316 optional)
Perforated media cylinder	AISI 304 SST (316 optional)
Discharge tank and piping	AISI 304 SST (316 optional)
All components and fasteners	AISI 304 SST (316 optional)
Trunnions	Nylon
Spray nozzles	Brass
Drive gear and sprocket	HDPE

Technical information subject to change without notice.

Enviro-Care is the exclusive licensee for SAVI S.R.L. technologies in North America.