


# FLO-Sieve

FSS

Shaftless Spiral Screening, Conveying  
Washing & Dewatering System

## Specifications

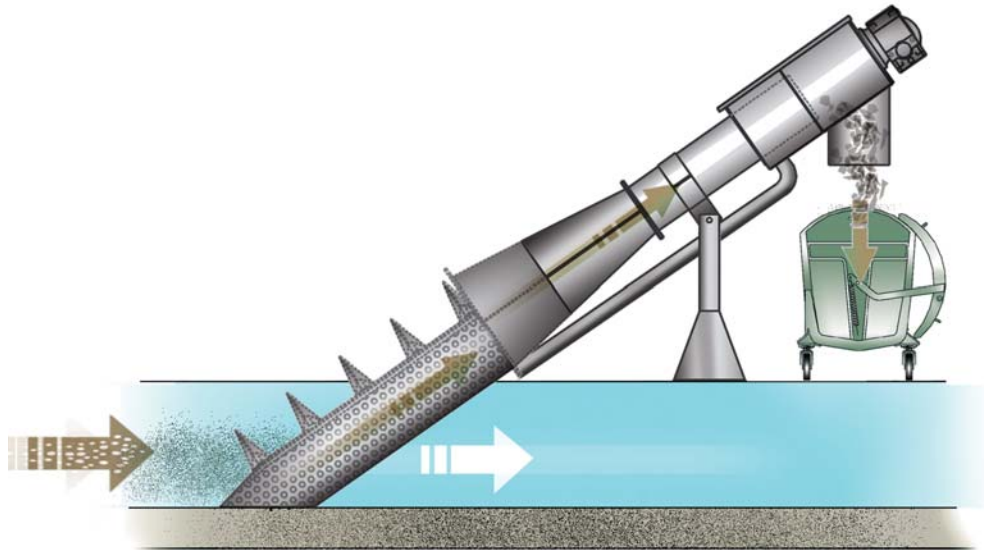

## Specifications

Flow rate	mgd	1 – 7
Channel widths	inches	16 – 36
Screen Openings	Mm (perforated media)	3 – 5 – 6
	Mm (wedgewire media)	1 – 2 (Optional)
Angle of inclination	degrees	35 (45 and 90 Optional)
Drive motor	Hp	.75 – 1.5
Voltage	V-Hz	240/480 V – 60 Hz
Controls		NEMA 4X/7

## Materials of Construction

Transport tube	304 SST (316 Optional)
Discharge chute	304 SST (316 Optional)
End plates & supports	304 SST (316 Optional)
Shaftless spiral	ST52-3 Alloy Steel (304/316 SST Optional)
Anti-rotation bars	304 SST (316 Optional)

Technical information subject to change without notice.

Enviro-Care is the exclusive licensee for SAVI S.R.L. technologies in North America.